



EF2-1

PELLET STOVE & FIREPLACE INSERT



enviro.com

EF2-1

PELLET STOVE & FIREPLACE INSERT

EF2-1 Pellet Fireplace Insert

Stove & Insert Specifications

Heat Input*	40,000 BTU		
BTU Input on Low	11,200 BTU		
Heating Area	2,000 ft ²		
Efficiency* (HHV)	77%		
EPA Emissions (g/hr)	1.4		
Hopper Capacity	55 lbs		
Igniter on Power Usage	520 watt		
Variable Fan Speed	200 cfm		
Minimum Insert Install Dims.	HEIGHT 22¾"	WIDTH 24"	DEPTH 11"

* Efficiency, emissions and area heated will vary according to fuel type, venting and location

Clearance to Combustibles


	Stove	Insert
From the sides of the unit	6"	9"
Behind the unit	2"	N/A
From the top of the unit	17¾"	N/A
From the front of the unit	9"	9"
From mantle to top of unit	N/A	8"

EF2-1 FS Features

- Firebox brick liner
- Recessed hopper lid handle
- Heavy-duty heat exchanger
- Welded firebox
- Full pedestal ash pan
- Easy-to-use controls
- Mobile home approved
- Optional log set

EF2-1 FPI Features

- Firebox brick liner
- Recessed hopper lid handle
- Heavy-duty heat exchanger
- Welded firebox
- Easy-to-use controls
- Optional log set
- Optional oversize surround
- (45"w x 33"h)

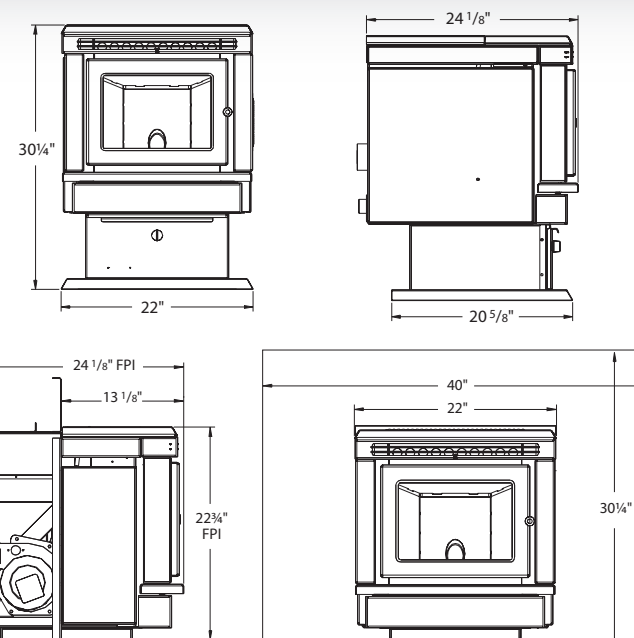

Manufactured by Sherwood Industries Ltd • Victoria, BC, Canada
enviro.com • info@enviro.com • Printed in Canada, August 2021

Designed & Built in
North America